


BPF 70/3

Band-Pass Filter for the 70 cm Band

DESCRIPTION

- The BPF 70/3 is a $3\frac{1}{4} \lambda$ resonator band-pass filter with internal coupling between the resonators.
- This filter can be used as a preselector to protect a receiver against interference from transmissions out of the passband, or it can be used to reduce spurious output from a transmitter with up to 50 W output power.
- The filter can be tuned within the entire 406 - 470 MHz band. Careful design and choice of materials ensure reliable operation over a wide temperature range.
- The housing is made of extruded aluminium, the chassis of brass, and teflon insulation has been used in the coaxial cables and in the connectors.
- The filter is black vinyl coated to prevent corrosion.

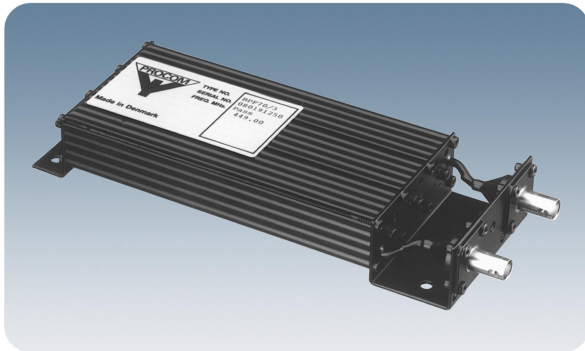


ORDERING DESIGNATIONS

TYPE	PRODUCT NO.
BPF 70/3	200000896

SPECIFICATIONS

ELECTRICAL	
MODEL	BPF 70/3
FILTER TYPE	Band-pass filter
TUNING RANGE	406 - 470 MHz
MAX. INPUT POWER	50 W
INSERTION LOSS	≤ 1.4 dB (typ.)
ATTENUATION AROUND PASS-BAND	See curves
OUT OF BAND ATTENUATION	See curves
IMPEDANCE	Nom. 50 Ω
SWR	≤ 1.5
MECHANICAL	
TEMP. RANGE	-30° C → +60° C
CONNECTORS	BNC-female (others on request)
DIMENSIONS (L x W x H)	230 x 77 x 33 mm
WEIGHT	Approx. 550 g

TYPICAL RESPONSE CURVES

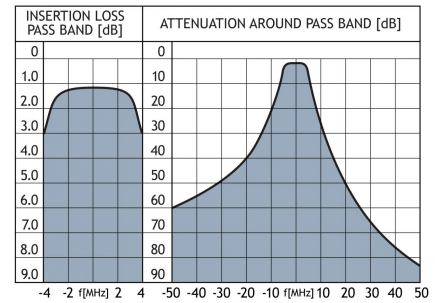

PROCOM A/S reserve the right to amend specifications without prior notice.

10/03/11