


1.0 ΔΤΥ vs 2.0 ΔΤΥ

WHICH ARE THE DIFFERENCES?

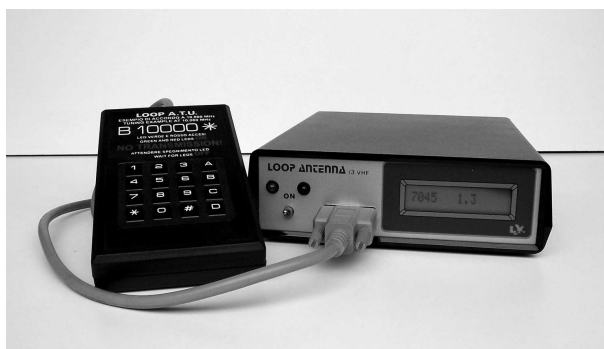

features	1.0 ΔΤΥ	2.0 ΔΤΥ
autotuning (with I/O RS232 card opt) for ICOM – YAESU & ELECRAFT	✗	✓
autodetect mode	✗	✓
I/O RS485 opt port for future applications	✗	✓
Ethernet port	✗	coming soon
firmware updates	✗	✓
CPU	8 bit	32 bit
LCD display	1x16	2x16
keyboard	proprietary hardware	USB compatible
chassis	plastic	aluminum